




MAXGARD® 500

UV Stabilizer (131-57-7) Benzophenone-3

TECHNICAL INFORMATION

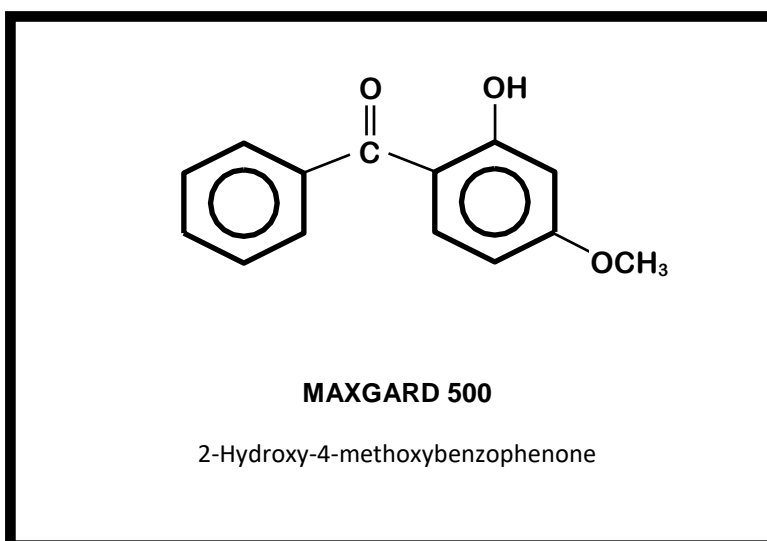

MAXGARD 500 is an effective UV absorber used as an active ingredient in sun screens and other personal care and beauty products. Additionally, it is effective for preventing discoloration in personal care and beauty products caused by exposure to sunlight or fluorescent lighting.

MAXGARD 500 is also used as an effective stabilizer for many plastics and coatings products.

APPLICATIONS

Personal Care – Sun Screens, Cosmetics, Product protection.

Plastics – PVC, Polyesters.

Coatings – Nitrocellulose lacquers, Varnishes, Oil Based paints.

MAXGARD® 300

UV Stabilizer (131-57-7) Benzophenone-3


PHYSICAL AND CHEMICAL PROPERTIES

Physical form – Free flowing light-yellow powder.

Melting Point – 63 - 65 °C

Mass Density - 1.33 g/cm³ at 25°C

Std. K-Value - 66 at 288nm

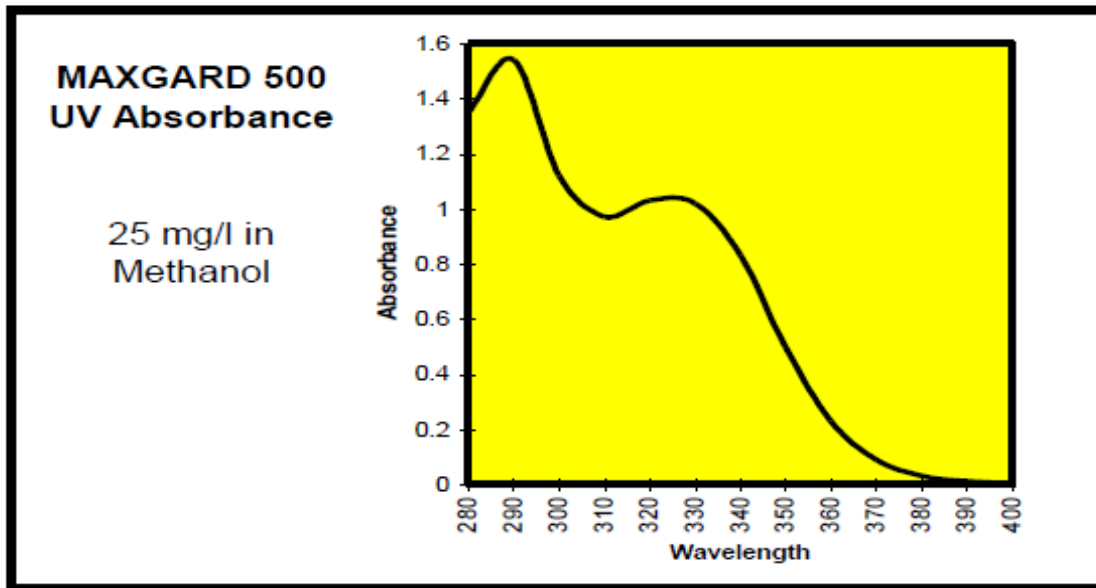

PACKAGING, SHIPPING & AVAILABILITY

The standard package size of **Maxgard® 500** is 25kg fiber drums (8 drums per pallet).

“The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does Lycus make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications.”