




## MAXGARD® DPA-2

UV Stabilizer (5232-99-5) Etocrylene

### TECHNICAL INFORMATION

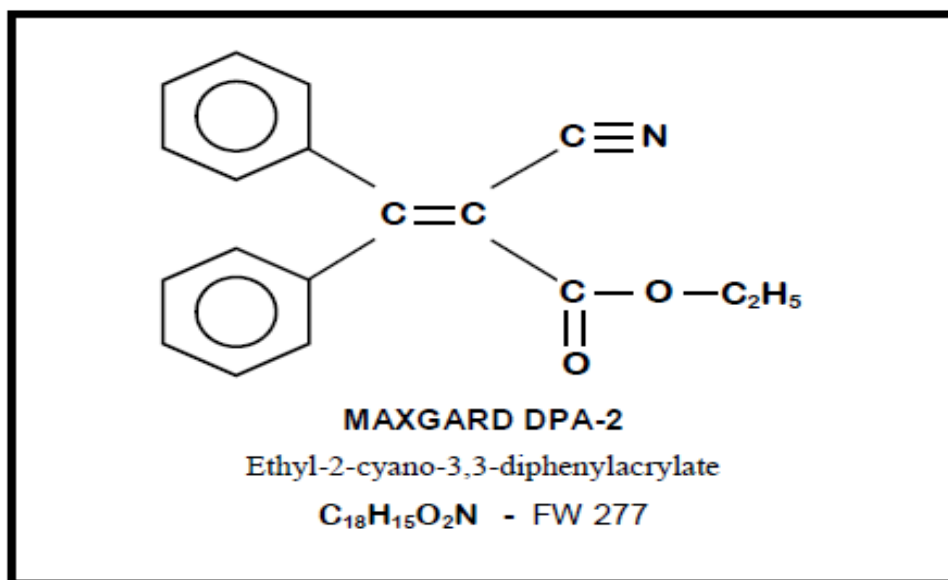

**MAXGARD DPA-2** is very effective at protecting plastics and coatings from the damaging ultraviolet radiation found in sunlight.

**MAXGARD DPA-2** offers excellent UV protection and good heat stability, a combination which makes it useful in many thermoplastic resins. It contributes less color to coatings and plastics than many other UV stabilizers.

### APPLICATIONS

**Plastics** – Polystyrene, Styrene Copolymers, Polycarbonate, PVC.

**Coatings** – Acrylics, Varnishes, Nitrocellulose and other Lacquers, Polyurethanes, Polyester Gel-Coats and Inks.

**Adhesives** – Vinyl and Acrylic.

# MAXGARD® DPA-2

UV Stabilizer (5232-99-5) Etocrylene


## PHYSICAL AND CHEMICAL PROPERTIES

**Physical Form** – White Powder

**Melting Point** – 93°C

**Mass Density** -1.16 g/cm<sup>3</sup> at 25°C

**Std. K-Value** – 47 at 304nm

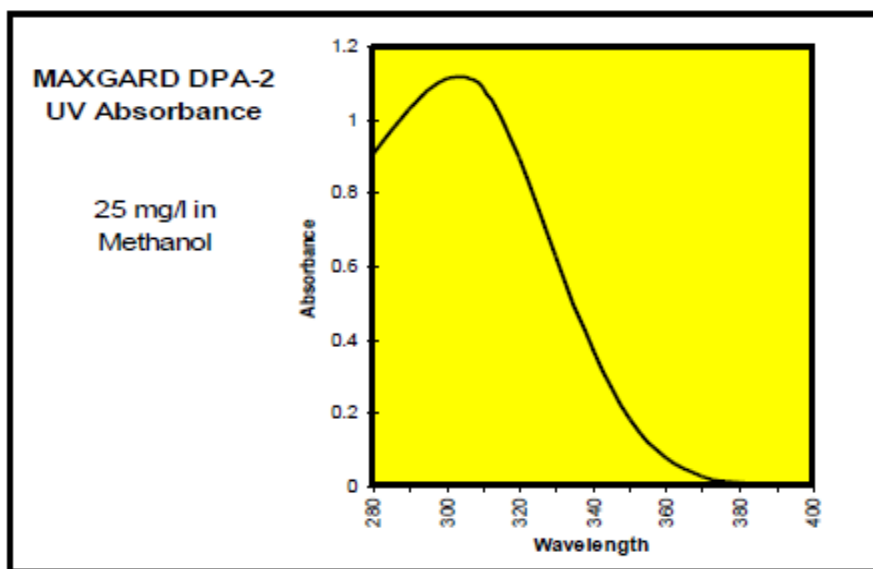

## PACKAGING, SHIPPING & AVAILABILITY

The product is available in 25kg fiber drums (8 drums per pallet).

“The information contained in this bulletin is based on information received of our staff and of others and is presented in good faith and with every belief in its accuracy. Due to the extensive technology involved in its usage, the manufacturer does not guarantee such information, nor does Lycus make any recommendations as to its use in the infringement of any patent. The information contained in this bulletin supersedes and replaces all information contained in all previous bulletins. Seller makes no warranty of any kind, expressed or implied, except that the goods sold hereunder shall meet the specifications of the buyer. Users are responsible for determining the effectiveness of stabilizers in their specific applications.”